


Detailed Calibration Summary



Feb 12, 2005


Bruce Burke

Samsung
HLP-5063

Notes:
firmware 1035

Before Calibration


Chromacity Coordinates

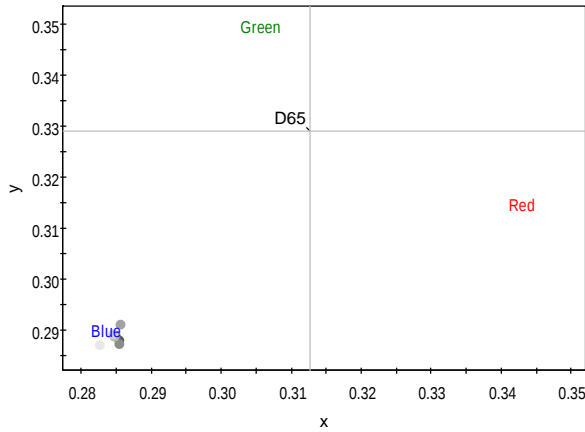

IRE	X	Y	LUM	dE
30	.2854	.2882	6.6784	36.4860
40	.2848	.2891	12.7074	35.9824
50	.2853	.2876	19.8102	36.9664
60	.2856	.2912	27.7312	34.2633
70	.2847	.2888	36.6849	36.2877
80	.2845	.2894	46.9510	35.9601
90	.2826	.2872	59.3888	38.1813
100	.2824	.2877	72.9456	37.9526

After Calibration


Chromacity Coordinates

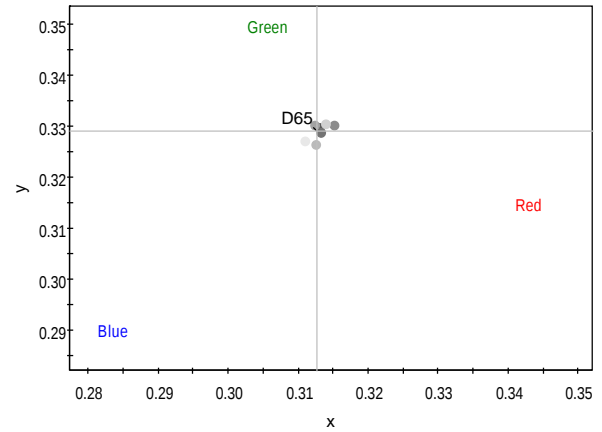

IRE	X	Y	LUM	dE
30	.3130	.3297	10.6242	.5548
40	.3132	.3289	20.0648	.5166
50	.3151	.3303	34.6715	2.0654
60	.3124	.3302	53.6784	1.1535
70	.3125	.3263	78.4999	2.2155
80	.3139	.3304	112.2768	1.2574
90	.3109	.3271	148.8070	1.8253
100	.3121	.3284	197.0293	.5931


Calibrated By:

Barry VanDenBerg



Before Calibration


Temperature Tracking

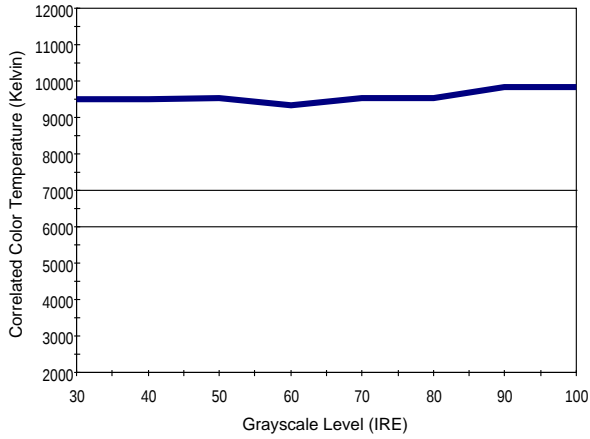

IRE	TEMP
30	9,490
40	9,499
50	9,524
60	9,324
70	9,528
80	9,528
90	9,844
100	9,843

After Calibration


Temperature Tracking

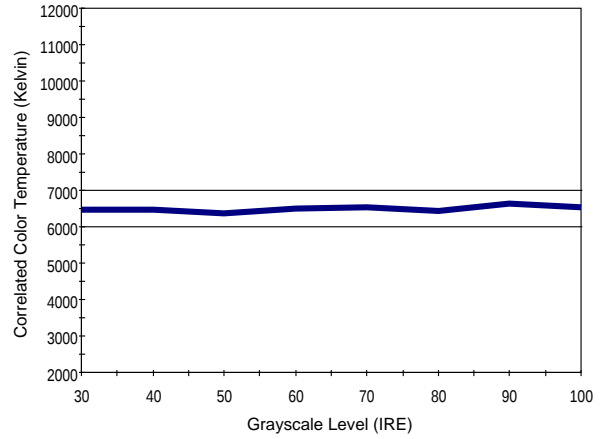

IRE	TEMP
30	6,483
40	6,478
50	6,364
60	6,510
70	6,535
80	6,427
90	6,617
100	6,541

Before Calibration


Color Tracking

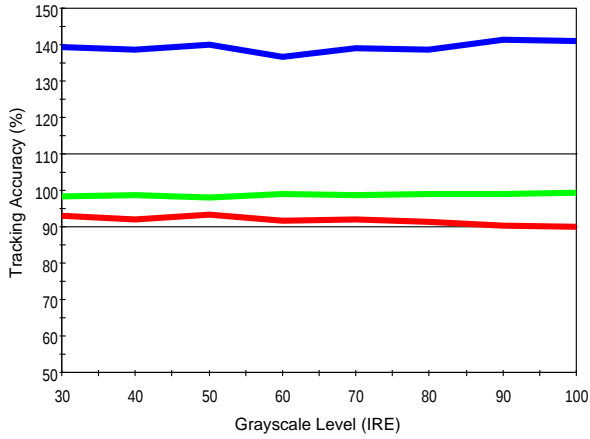

IRE	R	G	B
30	1.0742	1.0179	.7176
40	1.0872	1.0131	.7209
50	1.0704	1.0198	.7147
60	1.0906	1.0099	.7314
70	1.0861	1.0139	.7190
80	1.0939	1.0110	.7212
90	1.1051	1.0103	.7083
100	1.1111	1.0082	.7099

After Calibration

Color Tracking

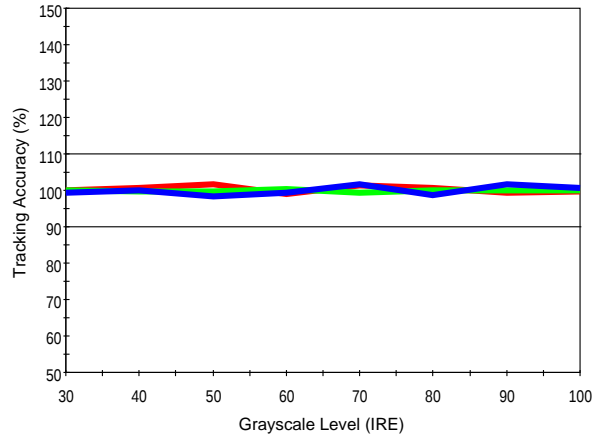

IRE	R	G	B
30	1.0009	.9991	1.0054
40	.9944	1.0020	1.0004
50	.9831	1.0045	1.0158
60	1.0091	.9960	1.0069
70	.9883	1.0062	.9825
80	.9950	1.0005	1.0126
90	1.0078	.9992	.9823
100	1.0029	.9996	.9943